



Features:


- Available with a choice of Electric BTPP System or Pneumatic BPPP System for hazardous, explosive working environments.
- Pulling gun communicates with power pack via DC remote control. This ensures safely and eliminates the need of electrical cord between pump and gun that other manufacturers provide.
- Microprocessor controls on power pack and gun ensure trouble free life.
- Low setup time and ease of operation.
- Removes tube without any damage to tube sheet.
- High power & High speed automatic cycling, for highest speed of pull available worldwide.
- Auto switchover from low pressure high flow to high pressure low flow on load and again back to low pressure high flow when load is released.
- Automatic slow start feature to minimize risk of breaking tubes and to conserve consumables.
- Compact design of Power pack and Gun.
- Interchangeable pulling guns with same Powerpack. 15 ton gun for light duty high speed work, 30 ton gun for heavy duty tube pulling and 45 ton gun for tubes up to 3" O.D.
- Significant saving of time and money over conventional system.
- Low maintenance cost and worldwide availability of components.
- Unit is portable with handle and mounted on four wheels for easy handling.
- Pulls up to 3" OD tubes continuously, pulls up to 4" O.D. stub.
- Unit will pull tubes continuously through the gun effortlessly, needing only one man for operation.
- Totally heavy steel metal body with duly power coated of power pack or stainless steel body can be provided for longer corrosion free life (Optional)

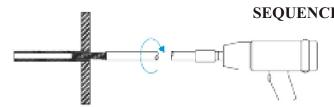

A) Thread mandrel into tube with Impact Wrench

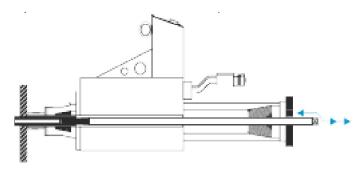


C) Switch to Auto Cycle by pressing 'AUTO' button till tube is completely removed. Gun will continue to cycle till one of the other button is pressed. When the button is free a tool can be inserted into the jaws to enable the tube to be pulled by hand.

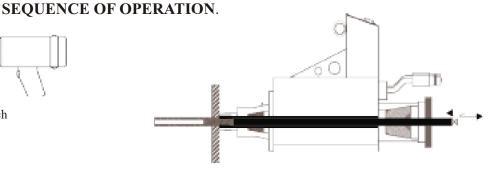

B) Mount Pulling Gun mandrel.

Automatic Slow Start to first break expanded joint.



D) Unscrew mandrel from pulled tube & proceed to next tube.



CONTINUOUS HYDRAULIC TUBE PULLER (3/8" TO 4")




TUBE PULLING POWERPACK - SPECIFICATIONS

| Model | Motor | Volts/ Phase | Power Hp | Oil Tank Capacity Ltrs. | Net Wt. Kgs. | Dim Mm | Air Supply | Hyd.Hoses Size x Length Inch x mtrs. |
|------------------------|---------|-----------------|-------------|-------------------------------|-----------------|-------------------|----------------------|--|
| BTPP-50 | Siemens | 415 / 3 | 5 | 90 | 220 | 1200 x 750 x 990 | - | 1 /2"x5 & 3/4" x5 |
| BTPP-75 | Siemens | 415 / 3 | 7.5 | 138 | 270 | 1225 x 775 x 1015 | - | 1 /2"x5 & 3/4" x5 |
| BTPP-30 | Siemens | 415 / 3 | 3 | 12 | 42 | 500 x 410 x 750 | - | 1 /2"x5 & 3/4" x5 |
| BPPP-50 (Pneumatic) | Gast | - | 9 | 90 | 220 | 700 x 560 x 480 | 1800 CFM AT 7 BAR | 1 /2"x5 & 3/4" x5 |

Note: Max. Working Pressure 350 Bar

All Powerpack supplied with 5mtr. Long hydraulic hoses.

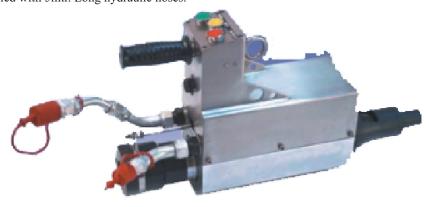


HYDRAULIC TUBE PULLING GUNS - SPECIFICATIONS

| Gun Model | Capacity Tons | Max. Tube O.D. Thru Gun Inch | Stub Pulling Capacity Inch | Weight Lbs. Kgs. | | (Meter/min) with Kgs. BTPP-50 BTPP-75 BTPP-30 BPPP-50 | | | | | | |
|--------------|---------------|---------------------------------------|----------------------------------|---------------------|----|--|-----|-----|-----|--|--|--|
| BHPG-15 | 15 | 1 | 1.1/2 | 57 | 26 | 5.2 | 8.4 | 1.8 | 5.6 | | | |
| BHPG-30 | 30 | 1.1/2 | 3 | 84 | 38 | 3.0 | 3.7 | 2.4 | 3.5 | | | |
| BHPG-45 | 45 | 3 | 4 | 172 | 78 | 2.0 | 2.7 | 2.0 | 2.3 | | | |

Note: All pulling guns are supplied with Forward, Reverse, & Auto Cycle Switches



ACCESSORIES FOR CONTINUOUS TUBE PULLER

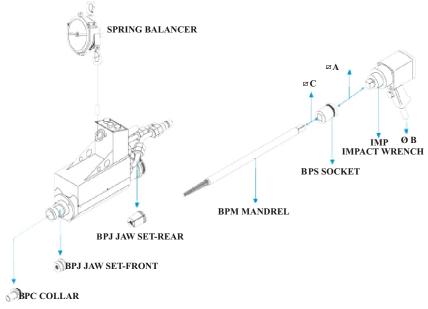

SPRING BALANCER

- * Used to pulling guns for 'feather touch', operation.
 * Free the operator from handling weight of the gun, allowing him to concentrate on the tube pulling operation.

| Model | Balance | r Range | For Pulling Gun Model | Weight | | |
|---------|-----------|---------|--------------------------|--------|------|--|
| BSEW-30 | 44 - 66 | 20 - 30 | BHPG-15 | 21.0 | 9.5 | |
| BSEW-40 | 66 - 88 | 30 - 40 | BHPG-30 | 23.1 | 10.5 | |
| BSEW-85 | 154 - 187 | 70 - 85 | BHPG-45 | 33.0 | 15.0 | |

IMP - IMPACT WRENCH

* Used to thread PM mandrels into tube with help of sockets.

| Model | Suited For Mandrel Model Numbers | Wei | ght | A | В | |
|--------|-------------------------------------|------|------|------|-------|--|
| | | Lbs | Kg | | | |
| BIMP-1 | BPM-7 to BPM-37 | 11.0 | 5.0 | 3/4" | 3/8" | |
| BIMP-1 | BPM-19 to BPM-95/102 | 23.0 | 10.5 | 1" | 1 /2" | |


PS = SOCKET

* Used to connect impact wrench to pulling mandrel.

| Model | A | В |
|-------|------|--------|
| BPS-1 | 3/4" | 3/8" |
| BPS-2 | 3/4" | 1 /2" |
| BPS-3 | 3/4" | 5/8" |
| BPS-4 | 3/4" | 3/4" |
| BPS-5 | 3/4" | 1" |
| BPS-6 | 1" | 3/4" |
| BPS-7 | 1" | 1 |
| BPS-8 | 1" | 1.1/2" |



WORKING CONSUMABLE - CONTINUOUS TUBE PULLER

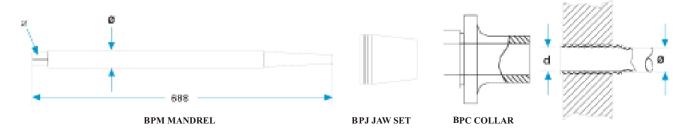


| | | Tube I.D. | | Mandrel | | Jaw Set | | Jaw Set | | Jaw Set | |
|----------|-------------|----------------------------|------------------------|---------|---------------|---------|-----------|---------|---------|---------|-----------|
| Tube | Size | After Ex | | Model | Square | | Model For | | | | Model For |
| | | | D | | Size | BPG-15 | | BHPG-45 | BHPG-15 | BHPG-30 | BHPG-45 |
| 0 | Bwg | Inch | Mm | BPM | B 🖂 | BPJ 15 | BPJ 30 | BPJ 45 | BPC 15 | BPC 30 | BPC 45 |
| 3/8" | 17-19 | 0.260-0.295 | 6.5-7.5 | 7 | 5/16" | 1 | 1 | | 11 | 11 | |
| 2,0 | 20-24 | 0.295-0.335 | 7.5-8.5 | 8 | 0,10 | - | - | | | | |
| | 14-16 | 0.335-0.375 | 8.5-9.5 | 9 | | | | | | 15 | |
| 1 / 2" | 17-18 | 0.375-0.415 | 9.5-10.5 | 10 | 3/8" | 2 | 2 | | 15 | | |
| | 19-21 | 0.415-0.455 | 10.5-11.5 | 11 | | | | | | | |
| | 24 | 0.455-0.495 | 11.5-12.5 | 12 | | | | | | | |
| 5/8" | 16-17 | 0.495-0.535 | 12.5-13.5 | 13A | 1 / 022 | _ | | | 1.0 | 1.0 | |
| 3/0 | 19-21 | 0.535-0.570 | 13.5-14.5 | 14A | 1 / 2" | 3 | 3 | | 18 | 18 | |
| | 23-24 | 0.570-0.610 | 14.5-15.5 | 15A | | | | | | | |
| | 11 | 0.495-0.535 | 12.5-13.5 | 13 | | | | | | | |
| | 12-13 | 0.535-0.570 | 13.5-14.5 | 14 | | | 4 | | | | |
| 3/4" | 14-15 | 0.570-0.610 | 14.5-15.5 | 15 | 5/8" | 4 | | | 21 | 21 | |
| | 16-17 | 0.610-0.650 | 15.5-16.5 | 16 | | | | | | | |
| | 18-20 | 0.650-0.690 | 16.5-17.5 | 17 | | | | | | | |
| | 21-24 | 0.690-0.730 | 17.5-18.5 | 18 | | | | | | | |
| 7/022 | 14 | 0.690-0.730 | 17.5-18.5 | 18 S | <i>5</i> /022 | 4/4 | 4/A | | 25 | 25 | |
| 7/8" | 16-17 | 0.730-0.770 0.770-0.810 | 18.5-19.5 | 19 S | 5/8" | 4/A | | | 25 | 25 | |
| | 18-19 | | 19.5-20.5 | 20 S | | | | | | | |
| | 10-11 | 0.730-0.770 | 18.5-19.5 19.5-20.5 | 19 | _ | | | | | | |
| 1" | 12 13-14 | 0.770-0.810 0.810-0.845 | 20.5-21.5 | 20 | | | | | | | |
| | 15-14 | 0.845-0.885 | 21.5-22.5 | 21 | 3/4" | 5 | 5 | 5 | 28 | 28 | 28 |
| | 18 | 0.885-0.925 | 22.5-23.5 | 22 23 | | | | | | | |
| | 19-20 | 0.885-0.925 | 23.5-24.5 | 23 | | | | | | | |
| | 13-20 | 0.845-0.886 | 21.5-22.5 | 22 G | | | | | | | |
| | 14-15 | 0.886-0.925 | 22.5-23.5 | 22 G | | | 6 6 | | | | |
| 3/4" Gas | 16-17 | 0.925-0.965 | 23.5-24.5 | 24 G | | | | 6 | | 31 | 31 |
| | 19-21 | 0.925-0.965 | 24.5-25.5 | 24 G | | | | | | | |
| | 10 | 0.965-1.005 | 24.5-25.5 | 25 0 | | | | | | | |
| | 11-12 | 1.005-1.045 | 25.5-26.5 | 26 | | | | 7 | | | |
| | 13 | 1.045-1.085 | 26.5-27.5 | 27 | | | | | | | |
| 1.1/4" | 14-15 | 1.085-1.125 | 27.5-28.5 | 28 | | | 7 | | | 34 | 34 |
| 1.1/4 | 16-18 | 1.125-1.160 | 28.5-29.5 | 29 | | | / | / | | 34 | 34 |
| | 19-22 | 1.160-1.200 | 29.5-30.5 | 30 | | | | | | | |
| | 23-24 | 1.200-1.240 | 30.5-31.5 | 31 | 1" | | | | | | |
| | 9 | 1.005-1.045 | 25.5-26.5 | 26 G | • | | | | | | |
| | 10 | 1.045-1.085 | 26.5-27.5 | 27 G | | | | | | | 37 |
| 1 Gas | 11-12 | 1.085-1.125 | 27.5-28.5 | 28 G | | | 8 | 8 | | 37 | |
| | 13-14 | 1.125-1.160 | 28.5-29.5 | 29 G | 1 | | | | | | |
| | 10-11 | 1.240-1.280 | 31.5-32.5 | 32 | | | | | | | |
| | 12-13 | 1.280-1.320 | 32.5-33.5 | 33 | | | | | | | 41 |
| 4.4/200 | 14 | 1.320-1.360 | 33.5-34.5 | 34 | | | | 9 | | 41 | |
| 1.1/2" | 15-17 | 1.360-1.400 | 34.5-35.5 | 35 | | | 9 | | | | |
| | 18-20 | 1.400-1.440 | 35.5-36.5 | 36 | | | | | | | |
| | 21-24 | 1.440-1.475 | 36.5-37.5 | 37 | | | | | | | |
| | | | | | | | | | | | |

Note: For Tubes larger than 3"O.D., Please contact us for larger size working consumable & larger size tube pulling guns. All models indicated above are for continuous pulling. When you are using equipment for stub pulling. Please contact us for modifications needed.



WORKING CONSUMABLE - CONTINUOUS TUBE PULLER

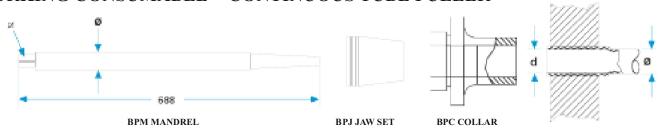

| Tube I.D. | | | | | Mandrel Jaw Set Coller | | | | | | |
|------------|----------------|----------------------------|------------------------|------------|------------------------|--------------------------------|--------|-----------|---------------------|--------|-----------|
| Tube Si | ze | After Exp | | | | Jaw Set Model For Model For | | Model For | Model For Model For | | Model For |
| 0.70 | D | | D | | Size | BPG-15 | BPG-30 | BHPG-45 | | | |
| O.D. | Bwg | Inch | Mm | BPM 27.C | | BPJ 15 | BPJ 30 | BPJ 45 | BPC 15 | BPC 30 | BPC 45 |
| | 12 | 1.440-1.475 | 36.5-37.5 | 37 G | | | | | | | |
| 1 1/42 0 | 13-14 | 1.475-1.515 | 37.5-38.5 | 38 G | | | 10 | 10 | | 4.4 | 44 |
| 1.1/4" Gas | 15-16 | 1.515-1.555 | 38.5-39.5 | 39 G | | | 10 | | | 44 | 44 |
| | 17-19 | 1.555-1.595 | 39.5-40.5 | 40 G | | | | | | | |
| | 20-24 | 1.595-1.635 1.475-1.515 | 40.5-41.5 | 41 G | | | | | | | |
| | 10-11 | | 37.5-38.5 | 38/44 | | | | | | | |
| | 12 | 1.515-1.555 | 38.5-39.5 | 39/44 | | | | | | | |
| 1.3/4" | 13-14 | 1.555-1.595 | 39.5-40.5 | 40/44 | | | | 11 | | | 48 |
| | 15-16 | 1.595-1.635 | 40.5-41.5 | 41/44 | 1 22 | | | | | | |
| | 18-19 | 1.635-1.675 | 41.5-42.5 | 42/44 | | | | | | | |
| | 20-24 | 1.675-1.715 | 42.5-43.5 | 43/44 | 1" | | | | | | |
| | 11-12 | 1.715-1.755 | 42.5-43.5 | 43G 44G | | | | 12 | | | |
| 1.1/2" Gas | 13-14 | 1.755-1.795 | 43.5-44.5 | | | | | | | | 53 |
| | 15-17 18-19 | 1.795-1.830 1.830-1.870 | 44.5-54.5 45.5-46.5 | 45G 46G | | | | | | | |
| | | | 43.5-46.5 | | | | | 13 | | | |
| | 10 | 1.830-1.870 1.870-1.910 | 44.5-45.5 | 44/51 | | | | | | | |
| | 13 | 1.910-1.950 | 45.5-46.5 | 46/51 | | | | | | | |
| 2" | | 1.910-1.930 | 45.5-46.5 | 47/51 | | | | | | | 54 |
| | 14-15 16-18 | 1.930-1.990 | 47.5-48.5 | 48/51 | | | | | | | |
| | 19-22 | 1.910-1.950 | 48.5-49.5 | 49/51 | | | | | | | |
| | 9-10 | 1.950-1.990 | 49.5-50.5 | 50/57 | | - | | | | | |
| 2.1/4" | 11 | 1.990-2.030 | 50.5-51.5 | 51/57 | | | | 14 | | | 60 |
| 2.1/4 | 12-13 | 2.030-2.070 | 51.5-52.5 | 52/57 | | | | 14 | | | 60 |
| | 7 | 1.990-2.030 | 50.5-51.5 | 51G | | | | | | | |
| 2" Gas | 8 | 2.030-2.070 | 51.5-52.5 | 52G | | | | 15 | | | 63 |
| 2 Gas | 9 | 2.070-2.105 | 53.5-53.5 | 53G | | | | 13 | | | 03 |
| | 7 | 2.015-2.145 | 53.5-54.5 | 54/63 | | | | | | | |
| | 8 | 2.145-2.185 | 54.5-55.5 | 55/63 | 3/4" | | | | | | |
| 2.1/2" | 9 | 2.185-2.225 | 55.5-56.5 | 56/63 | | | | 16 | | | 66 |
| | 10 | 2.225.2.265 | 56.5-57.5 | 57/63 | | | | | | | |
| | 7 | 2.580-2.620 | 66.5-67.5 | 67/76 | | | | | | | |
| | 8 | 2.620-2.660 | 67.5-68.5 | 68/76 | | | | | | | |
| 3" | 9-10 | 2.660-2.695 | 68.5-69.5 | 69/76 | | | | 17 | | | 80 |
| | 11 | 2.695-2.735 | 69.5-70.5 | 70/76 | | | | | | | |
| | 1.1 | 2.075 2.155 | 07.5-10.5 | 70/70 | | | | | | | |

Note: For Tube larger than 3" O.D., please contact for us for larger size working consumables and larger size tube pulling guns. All models indicated above are for continuous tube pulling. When you are using equipment for stub pulling, please contact us for Modifications needed.